

SAMSUNG

SyncMaster 770TFT SyncMaster 870TFT SyncMaster 170T

TFT-LCD Monitor



**Owner's
Instructions**

Information in this document is subject to change without notice.

© 2000 Samsung Electronics Co., Ltd. All rights reserved.

Reproduction in any manner whatsoever without the written permission of Samsung Electronics Co., Ltd. is strictly forbidden.

Samsung Electronics Co., Ltd. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

The *Samsung logo* and *SyncMaster* are registered trademarks of Samsung Electronics Co., Ltd.; *Microsoft*, *Windows*® and *Windows*® *NT* are registered trademarks of Microsoft Corporation; *VESA*, *DPMS* and *DDC* are registered trademarks of Video Electronics Standard Association; the *ENERGY STAR* name and logo are registered trademarks of the U.S. Environmental Protection Agency (EPA). As an ENERGY STAR Partner, Samsung Electronics Co., Ltd. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. All other product names mentioned herein may be the trademarks or registered trademarks of their respective owners.

Table of Contents

Safety Instructions	2
Unpacking Your LCD Monitor	3
Setting up Your LCD Monitor	4
Setting up an Ergonomic Workstation	4
Monitor location	4
Workstation height	4
Viewing angle	4
Kensington Security Slot	4
Connecting Your LCD Monitor	5
Getting Help	7
Plug and Play	7
Auto Adjustment	7
Installing the Video Driver	7
Windows® 98	8
Windows® 95	8
Self-Test Feature Check (STFC)	9
Adjusting Your LCD Monitor	10
User Controls	10
Automatic Save	11
Direct-Access Features	11
Brightness	11
Auto Adjustment	12
OSD Lock/Unlock	12
On Screen Display (OSD)	13
Accessing the Menu System	13
Appendix	17
PowerSaver	17
Troubleshooting	18
Specifications	20
Pin Assignments	21
Display Modes	23
Changing the Stand	24
Removing the Stand	24
Attaching an Arm-Type Stand or Wall Mount Hanger	25
Maintenance of Your LCD Monitor	25
Index	26
Regulatory Information	inside back cover

Safety Instructions

- 1 Before connecting the AC power cord to the DC adapter outlet, make sure the voltage designation of the DC adapter corresponds to the local electrical supply.
- 2 Never insert anything metallic into the openings in the cabinet of the Liquid Crystal Display (LCD) monitor; doing so may create the danger of electric shock.
- 3 To avoid electric shock, never touch the inside of the LCD Monitor. Only a qualified technician should open the case of the LCD Monitor.
- 4 Never use your LCD Monitor if the power cord has been damaged. Do not allow anything to rest on the power cord, and keep the cord away from areas where people can trip over it.
- 5 Be sure to hold the plug, not the cord, when disconnecting the LCD Monitor from an electric socket.
- 6 Openings in the LCD Monitor cabinet are provided for ventilation. To prevent overheating, these openings should not be blocked or covered. Also, avoid using the LCD Monitor on a bed, sofa, rug, or other soft surface. Doing so may block the ventilation openings in the bottom of the cabinet. If you put the LCD Monitor in a bookcase or some other enclosed space, be sure to provide adequate ventilation.
- 7 Put your LCD Monitor in a location with low humidity and a minimum of dust
- 8 Do not expose the LCD Monitor to rain or use it near water (in kitchens, near swimming pools, etc.). If the LCD Monitor accidentally gets wet, unplug it and contact an authorized dealer immediately. You can clean the LCD Monitor with a damp cloth when necessary, but be sure to unplug the LCD Monitor first.
- 9 Place the LCD Monitor on a solid surface and treat it carefully. The screen is made of thin glass with a plastic front surface and can be damaged if dropped, hit or scratched. Do not clean the front panel with keton-type materials (e.g., acetone), ethyl alcohol, toluene, ethyl acid, methyl, or chloride – these may damage the panel.
- 10 Locate your LCD Monitor near an easily accessible AC outlet.
- 11 If your LCD Monitor does not operate normally – in particular, if there are any unusual sounds or smells coming from it – unplug it immediately and contact an authorized dealer or service center.
- 12 High temperature can cause problems. Don't use your LCD Monitor in direct sunlight, and keep it away from heaters, stoves, fireplaces, and other sources of heat.
- 13 Unplug the LCD Monitor when it is going to be left unused for an extended period of time.
- 14 Unplug your LCD Monitor from the AC outlet before any service.



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



**CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER
(OR BACK).
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.**

Unpacking Your LCD Monitor

Please make sure the following items are included with your monitor. If any items are missing, contact your dealer.




DC-Adapter



Manual



Warranty Card
(not available everywhere)



Monitor and Base



Colorific
& Driver



Power Cord



15-pin D-Sub Signal Cable



DVI-I Signal Cable (Optional)
(SyncMaster 170T only)

Setting up an Ergonomic Workstation

Consider the advice given below before you install your monitor.

Monitor location

Choose a position that exposes you monitor to the least reflection from lights or windows, usually at a right angle to any window.

Workstation height

Place your LCD Monitor so that the top of the screen is slightly below your eye level when you are comfortably seated.

Viewing angle

Tilt the screen backward or forward to a comfortable viewing position.




Figure 1. Tilt the screen

Kensington Security Slot

This monitor offers you the opportunity to secure your monitor using a Kensington-type security device. Kensington lock not included. Refer to your locking device documentation for installation instructions.

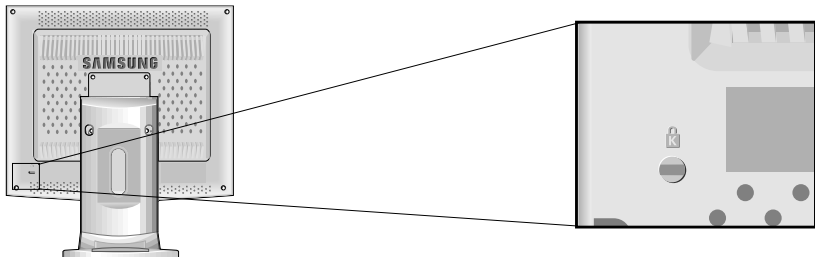


Figure 2. Kensington-type security slot location

Connecting Your LCD Monitor

This monitor offers a method for connection to both a PC and a workstation. One or both types of signal cables can be connected to the monitor simultaneously. Determine which connection method(s) you need and refer to the instructions below.

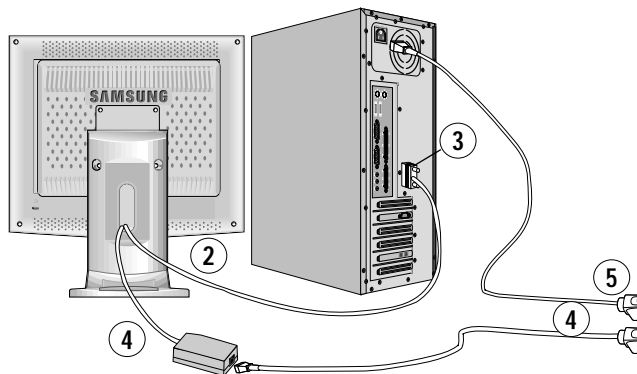


Figure 3.1 Cable Connection (Analog)

- 1** Turn off your computer and unplug its power cord.
- 2** Connect the signal cable to the 15-pin, D-sub connector on the back of your monitor.
- 3** Connect the signal cable to the video port on your computer, video board, video card, or graphics card.
- 4** Connect the power cord for your monitor to the DC adapter and connect the adapter jack to the DC power port on the back of your monitor.
- 5** Plug the computer and monitor power cords into a nearby power mains outlet.
- 6** Turn your computer and monitor on. If your monitor displays an image, it has been successfully installed.
- 7** If necessary, install the video driver for this monitor (see "Installing the Video Driver" on page 7).
- 8** After your monitor has been fully installed, run Auto Adjustment (see page 12).

Setting up Your LCD Monitor

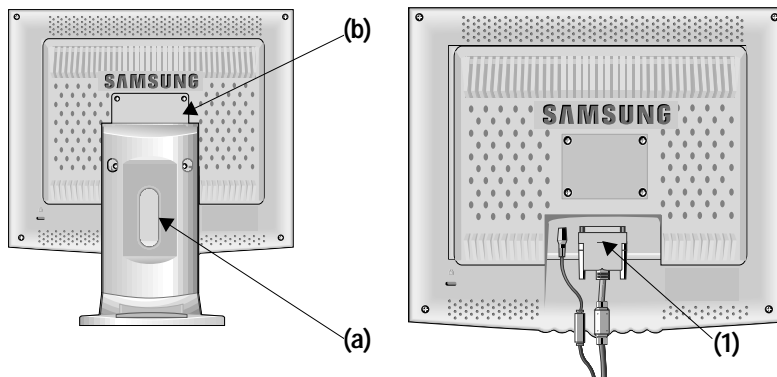


Figure 3.2 DVI-I Cable Connection (SyncMaster 170T only)

- 1** Turn off your computer and unplug its power cord.
- 2** Connect the signal cable to the DVI-I connector (1) on the back of your monitor. Connect the other end of the cable to the video port on the back of your computer.
- 3** Connect the power cord for your monitor to the power port on the power adapter.
- 4** Secure the power adapter cord and the signal cable(s) under the metal prong.
- 5** Insert the tab on each side of the hinge cover (b) then attach the stand of the monitor.
- 6** Plug the power cords of your computer and your monitor into a nearby outlet.
- 7** Turn on your computer and monitor. If your monitor displays an image, installation is complete.
- 8** Perform the auto adjustment procedure as described in "Auto Adjustment" on page 7.

Getting Help

If your monitor does not display an image, check your cable connections and refer to "Troubleshooting" on page 18. If you experience difficulties with the quality of the displayed image, run auto adjustment again and refer to "Adjusting Your LCD Monitor" on page 10 or "Troubleshooting" on page 18.

Plug and Play

Our adoption of the new VESA® Plug and Play solution eliminates complicated and time consuming setup. It allows you to install your monitor in a Plug and Play compatible system without the usual hassles and confusion. Your PC system can easily identify and configure itself for use with your display. This monitor automatically tells the PC system its Extended Display Identification (EDID) data using Display Data Channel (DDC) protocols so the PC system can automatically configure itself to use the LCD Monitor.

Auto Adjustment

Even though your computer system can recognize your new LCD Monitor system, the auto adjustment function will optimize the display settings for use with your computer. Auto Adjustment can be accessed through the On Screen Display, see "Image Lock:" on page 14 or use the direct access instructions below:

- 1** Turn on your computer and monitor.
- 2** Push the **AUTO** button to open the Auto Adjustment OSD.
- 3** The screen will dim and you may notice small changes to the screen image.

Installing the Video Driver

When prompted by the operating system for the monitor driver, insert the Driver diskette included with this monitor. Driver installation is slightly different from one operating system to another. Follow the directions as appropriate for the operating system you have.

Setting up Your LCD Monitor

Windows® 98

- 1 Windows® 98 will auto-detect your new monitor and start the "Add New Hardware Wizard" if the drivers are not already installed. Click the **NEXT** button to search for drivers.
- 2 Check the diskette drive box to install the drivers off the diskette provided with your monitor and click **NEXT**.
- 3 Confirm that Windows found the driver on the diskette and click **NEXT** again to install the driver.

To manually install or update the driver, follow the directions below:

- 1 Click on **START, SETTINGS, CONTROL PANEL, DISPLAY SETTINGS** tab, **ADVANCED, MONITOR** tab, **CHANGE**. This will start the "Add New Hardware Wizard".
- 2 Follow the same directions as given in the steps in the section above.

Windows® 95

To determine the version of Windows® 95 that your computer uses, right click on the **My Computer** icon on the Windows desktop and select **Properties**. The version number can be seen on the **General** section under "System:". Follow the directions given below according to the version of your Windows® 95 operating system:

Version 4.00.950A

- 1 Click on **START, SETTINGS, CONTROL PANEL, DISPLAY SETTINGS** tab, **CHANGE DISPLAY TYPE, CHANGE, HAVE DISK**.
- 2 Type the diskette drive letter in the box and click **OK**.

Version 4.00.950B

- 1 Click on **START, SETTINGS, CONTROL PANEL, DISPLAY, ADVANCED PROPERTIES, MONITOR** tab, **HAVE DISK**.
- 2 Type the diskette letter in the box and click **OK**.

Self-Test Feature Check (STFC)

Your monitor provides a self test feature that allows you to check whether your monitor is functioning properly. If your monitor and computer are properly connected but the monitor screen remains dark and the power indicator is blinking, run the monitor self-test by performing the following steps:

- 1** Turn off both your computer and the monitor.
- 2** Unplug the video cable from the back of the computer.
- 3** Turn on the monitor.

If the monitor is functioning properly, you will see a white box with a red border and black text inside as shown in the following illustration:

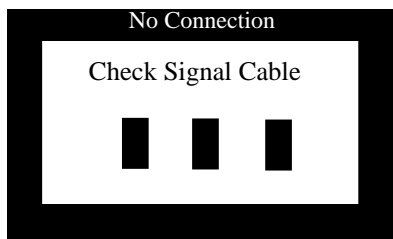


Figure 4. Monitor self test screen

The three boxes inside the border are red, green and blue. Failure of any of the boxes to appear indicates a problem with your monitor. This box also appears during normal operation if the video cable becomes disconnected or damaged.

- 4** Turn off your monitor and reconnect the video cable; then turn on both your computer and the monitor.

If your monitor screen remains blank after using the previous procedure, check your video controller and computer system; your monitor is functioning properly.

Adjusting Your LCD Monitor

User Controls

Your LCD Monitor allows you to easily adjust the characteristics of the image being displayed. All of these adjustments are made using the control buttons on the front of the monitor. While you use these buttons to adjust the controls, an on screen display shows you their numeric values as the change.

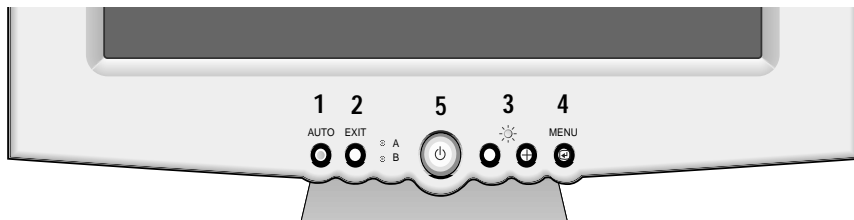


Figure 5. User controls

No.	Name	Description
1	AUTO	<ul style="list-style-type: none">■ Activates the Auto Adjustment function
2	EXIT	<ul style="list-style-type: none">■ Exits from the OSD while the OSD is displayed■ Selects the Video signal (A or B) while the OSD is off (SyncMaster 170T only)<ul style="list-style-type: none">– (LED) A : D-sub or DVI-I (Analog)– (LED) B : DVI-D (Digital)
3	<div>- / +</div> Brightness	<ul style="list-style-type: none">■ Moves the selector between menus and sub-menus on the OSD■ Decreases or increases values of the selected function■ Directly adjusts the brightness level if pressed while the OSD is off (See the section on "Direct-Access Features" on page 11.)
4	MENU	<ul style="list-style-type: none">■ Opens the OSD and sub-menus■ Selects the highlighted function
5	Power button and Indicator light	<ul style="list-style-type: none">■ Turns the monitor on and off■ Glows green during normal operation■ Glows amber, blinks amber, or blinks green / amber while the monitor is in a power saving mode. (See "Power-saving modes" on page 17.)

Automatic Save

Whenever you open the On Screen Display and allow an adjustment window to remain active for about 3 seconds without pressing another button, the monitor automatically saves any adjustments you have made. These changes are saved into a user area in the monitor. User areas are reserved according to the signal frequency from your computer. The monitor can save adjustments for up to 5 user modes. It has ten factory preset or preload modes, one for each signal frequency as listed in "Display Modes" on page 23

If you have made no adjustments, the on screen display disappears and the monitor does not save anything. To exit without saving the changes you have made, press the **EXIT** button before the 2 seconds elapse.

Direct-Access Features

The features described in this section can be accessed quickly, at the touch of one button. Once you finish making adjustments to a feature, push the **EXIT** button to turn off the menu or allow the OSD to time-out and disappear automatically.

Brightness




Follow these instructions to adjust the brightness of the monitor's display.

- 1** With the menu off, push the "—" or "+" button. The brightness display appears.
- 2** Push the "+" button to increase the brightness; push the "—" button to decrease the brightness.

Adjusting Your LCD Monitor

Auto Adjustment



Follow these instructions to enable or disable the automatic screen adjustments for your monitor.

- 1** With the menu off, push the **EXIT** button. The automatic adjustment display appears.
- 2** Follow the directions previously given on page 7.

OSD Lock/Unlock

Use this function to secure the current settings, while allowing you to adjust the Brightness and Contrast, so that they cannot be inadvertently changed. You can unlock the OSD controls at any time by using the same procedure.

- 1** Push and hold the **MENU** button for 5 seconds to Lock or Unlock the controls. When locked, a "LOCKED" message displays.

On Screen Display (OSD)

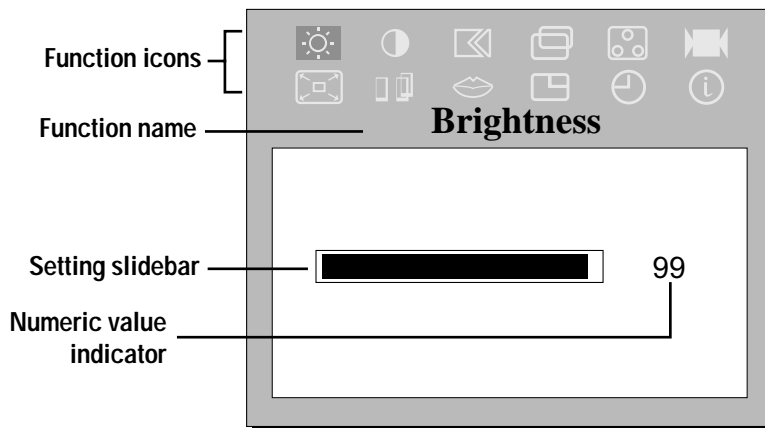


Figure 6. On Screen Display (OSD)

Accessing the Menu System

- 1** With the menu off, push the **MENU** button to open the menu system and display the main function menu.
- 2** Push the “-” and “+” buttons to move between the function icons. As you move from one icon to another, the function name changes to reflect the function or group of functions represented by that icon. See the Menu adjustments table to view a complete list of all the functions available for the monitor.
- 3** Push the **MENU** button once to activate the highlighted function then use the “-” and “+” buttons, according to the indicators on the menu, to make your changes.
- 4** Push the **EXIT** button once to return to the main menu to select another function or push the **EXIT** button 1 or 2 times to exit from the OSD




* Note for SyncMaster 170T User's

Some OSD function are not available when the monitor is in Digital Mode.

Function not available in Digital Mode : Image Lock, Position, Color Control, Reset, Contrast






Adjusting Your LCD Monitor

Table 1. Menu Adjustments

Icon	Settings and Sub-menus	Description
	Image Lock: <ul style="list-style-type: none">■ Fine■ Coarse	Image Lock controls adjust for and limit the amount of noise in the video signal which causes horizontal lines or areas on the screen where the image appears to be unstable and jitters or shimmers.
		The Fine and Coarse adjustments allow you to more closely adjust your monitor to your preference. Use the “–, +” buttons to adjust away interference. If satisfactory results are not obtained using the Fine adjustment, use the Coarse adjustment and then use Fine again. This function may change the width of the display image. Use the Horizontal function on the Position menu to center the display image on the screen.
	Position: <ul style="list-style-type: none">■ Horizontal■ Vertical	Position moves the viewing area around on the monitor screen.
	Color Control: <ul style="list-style-type: none">■ R(ed)■ G(reen)■ B(lue)	Color Controls adjust the color hue and saturation. The color hue is most noticeable in areas of white.



Adjusting Your LCD Monitor

Table 1. Menu Adjustments (*Continued*)

Icon	Settings and Sub-menus	Description
	Reset: <ul style="list-style-type: none"> ■ Geometry ■ Color 	Reset controls return the settings to the factory preset values for the selected group of functions. Geometry changes the Position settings, Image Lock settings and changes the Image Size to Expand 2. Color changes the RGB settings back to their original factory settings.
	Image Size: <ul style="list-style-type: none"> ■ Normal ■ Expanded 1 ■ Expanded 2 	If your computer or video board supplies a signal rate and addressability lower than 1280 x 1024, this LCD Monitor provides a scaling processor that can expand the addressability up to 1280 x 1024. Select the Normal setting to use the normal size viewing area for the current signal. Expanded 1 expands the viewing area to the full width of the monitor screen. Expanded 2 extends the viewing area both horizontally and vertically to the full size of the monitor screen.
	Menu Effect: Half Tone <ul style="list-style-type: none"> ■ On ■ Off 	Half Tone changes the opaqueness of OSD background when Half Tone is "on", the background of OSD menu becomes half-transparent.
	Language: <ul style="list-style-type: none"> ■ English ■ Deutsch ■ Español ■ Français ■ Italiano ■ Svenska 	Language sets the OSD to display in one of six languages (English, French, German, Spanish, Italian, or Swedish). The language chosen affects only the language of the OSD. It has no effect on any software running on the computer.
	Menu Display Time: <ul style="list-style-type: none"> ■ 5 Seconds ■ 10 Seconds ■ 20 Seconds ■ 200 Seconds 	The OSD stays active for as long as it is in use. Menu Display Time sets the length of time the OSD will remain active after the last time you pushed a button.

Adjusting Your LCD Monitor

Table 1. Menu Adjustments (*Continued*)

Icon	Settings and Sub-menus	Description
	Menu Position: <ul style="list-style-type: none">■ Horizontal■ Vertical	Each time the OSD opens it displays in the same location on the screen. Menu Position controls that location.
	Display Mode:	Select this icon to view the current user mode. This screen only displays information; you cannot select a new setting.

PowerSaver

This monitor has a built-in power management system called PowerSaver. This system saves energy by switching your monitor into a low-power mode when it has not been used for a certain amount of time. The available modes are "On", "Standby", "Sleep", and "Deep Sleep".

PowerSaver operates with a VESA DPMS compliant video card installed in your computer. You use a software utility installed on your computer to set up this feature. See Table 2 below for details.

Table 2. Power-saving modes

State	Normal Operation	Power-Saving Function mode (EPA/NUTEK)		
		Standby Mode	Sleep Mode Position A1	Deep Sleep Mode Position A2
Horizontal Sync Vertical Sync Video	Active Active Active	Inactive Active Blanked	Active Inactive Blanked	Inactive Inactive Blanked
Power Indicator	Green	Amber	Amber Blinking (0.5 sec. interval)	Amber Blinking (1 sec. interval)
Power Consumption	42 W (Max.) 40 W (Nom.)	Less than 5 W	Less than 5 W	Less than 5 W

NOTE: *This monitor automatically returns to normal operation when horizontal and vertical sync return. This occurs when you move the computer's mouse or press a key on the keyboard.*

This monitor is EPA ENERGY STAR[®] compliant and NUTEK compliant when used with a computer equipped with VESA DPMS functionality.

For energy conservation, turn your monitor OFF when it is not needed, or when leaving it unattended for long periods.

Troubleshooting

Before calling for service, check the information in this section to see if you can remedy any problems yourself.

Table 3. Troubleshooting problems

Symptom	Corrective Actions
No Picture	■ Check to see that both the LCD Monitor and the computer are plugged in and turned on.
"No Connection, Check Signal Cable" appears	■ Check the signal cable connection between the computer and the LCD Monitor ■ Use the LCD Monitor self test described on page 9.
"Video mode not supported"	■ Check the maximum resolution and the frequency on the video port of your computer. ■ Compare these values with the data in the preset timing modes, page 23.
Picture is scrambled	■ Check the signal cable connection between the computer and LCD Monitor. ■ Perform Auto Adjustment (see page 7).
Picture is not clear	■ Adjust Fine and Coarse adjustments as needed (see page 14).
Picture is fuzzy	■ Perform LCD Monitor reset. ■ Eliminate accessories (i.e., video extension cables).
Picture bounces or has wavy oscillations	■ Check the signal cable connection between the computer and LCD Monitor
Picture appears to be ghosting	■ Check the signal cable connection between the computer and LCD Monitor.
The image is too light or too dark	■ Adjust the Brightness and Contrast settings.
Color is not uniform	■ Adjust the color settings using the OSD COLOR menu.
The colors are distorted with dark or shadowed areas	■ Adjust the color settings using the OSD COLOR menu.

Appendix

Table 3. Troubleshooting problems (*Continued*)

Symptom	Corrective Actions
White does not look white	■ Adjust the color settings using the OSD COLOR menu.
Screen image is not centered or sized properly	■ Adjust the Horizontal and Vertical position settings using the OSD. ■ Check the image size selection (see page 17). ■ Run Auto Adjustment (see page 7).
The power indicator blinks amber once	■ The LCD Monitor is saving your changes to the OSD.
The power indicator is blinking amber	■ The LCD Monitor is using its power management system. Check the power management utility on your computer.
Cannot adjust LCD Monitor with the buttons on the front panel	■ Please contact Samsung customer service.
You need the monitor driver software	■ You can download the driver from the internet at http://www.samsung-monitor.com http://www.samsungmonitor.com(USA only)

Specifications

Table 4. Specifications

LCD Monitor Panel	770TFT/170T : 43 cm (17") LCD Monitor 0.264 mm Pixel pitch 870TFT : 46 cm (18.1") LCD Monitor 0.2805 mm Pixel pitch Viewing Angle: 80/80/80/80 (U/D/L/R) (Degrees)
* Synchronization	Horizontal: 30 kHz to 81 kHz Vertical: 56 Hz to 85 Hz (~XGA) 60 Hz to 76 Hz (SXGA)
Display Colors	16.7 Million Colors
Maximum Resolution	Horizontal: 1280 Dots Vertical: 1024 Lines
Active Display	770TFT/170T : Horizontal: 338 ± 3 mm (13.3" ± 0.12") Vertical: 270 ± 3 mm (10.6" ± 0.12") 870TFT : Horizontal: 359.04 ± 3 mm (14.1" ± 0.12") Vertical: 287.23 ± 3 mm (11.3" ± 0.12") (Active display size is dependent upon signal timing and image size selection.)
Input Signal, Terminated	Analog video 0.7 Vpp positive at 75 Ω Separate sync, composite, and sync-on-green, TMDS (SyncMaster 170T only)
Maximum Pixel Clock	135 MHz
Power Adapter	AC 90-264 Volt, 60 Hz/50 Hz ± 3 Hz
Power Consumption	42 W (Maximum), 40 W (Nominal)
Dimensions/Weight (W x D x H)	770TFT/170T : 440 x 182 x 462 mm; 7.9 kg (17.32 x 7.16 x 18.19 in; 17.41 lbs) 870TFT : 461 x 182 x 465 mm; 8.3 kg (18.14 x 7.16 x 18.30 in; 18.29 lbs) (All measurements approximate)
VESA Mounting Interface	100 mm x 100 mm (For use with Specialty (Arm) Mounting hardware.)
Environmental Considerations	Operating Temperature: 50°F to 104°F (10°C to 40°C) Humidity: 10% to 80% Storage Temperature: -68°F to 113°F (-20°C to 45°C) Humidity: 5% to 95%

NOTE: Design and specifications are subject to change without prior notice.

* Referring to Preset timing modes, page 23.

Pin Assignments

Table 5. 15-Pin D-SUB connector

Pin No.	15-Pin Side of the Signal Cable	Pin No.	15-Pin Side of the Signal Cable
1	Red	9	NC
2	Green	10	GND-Sync/Self test
3	Blue	11	GND
4	GND	12	DDC Data
5	GND (DDC Return)	13	H-Sync
6	GND-R	14	V-Sync
7	GND-G	15	DDC Clock
8	GND-B		

Appendix

Table 6. DVI-I Connector (SyncMaster 170T only)

Pin	Signal Assignment	Pin	Signal Assignment
1	T.M.D.S. DATA2-	16	Hot Plug Detect
2	T.M.D.S. DATA2+	17	T.M.D.S. DATA0-
3	T.M.D.S. DATA2 Shield	18	T.M.D.S. DATA0+
4	No Connect	19	T.M.D.S. DATA0 Shield
5	No Connect	20	No Connect
6	DDC Clock	21	No Connect
7	DDC Data	22	T.M.D.S. Clock Shield
8	Analog Vertical Sync	23	T.M.D.S. Clock +
9	T.M.D.S. DATA1-	24	T.M.D.S. Clock -
10	T.M.D.S. DATA1+	25(C3)	Analog Blue
11	T.M.D.S. DATA1 Shield	26(C5)	Analog Ground
12	No Connect	27(C4)	Analog Horizontal Sync
13	No Connect	28(C2)	Analog Green
14	+5V Power	29(C5)	Analog Ground
15	Ground(for +5V)	30(C1)	Analog Red

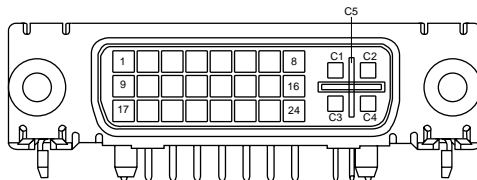


Figure 7. DVI-I Connector

Display Modes


If the signal from the system equals to the standard signal mode, the screen is adjusted automatically. If the signal from the system doesn't equal to the standard signal mode, adjust the mode with referring to the Videocard user guide because the screen might not display or only the power LED might be on. For the display modes listed below, the screen image has been optimized during manufacture.

Table 7. Preset timing modes

Display Mode	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Pixel Clock (MHz)	Sync Polarity (H/V)
720 x 400	31.469	70.087	28.322	-/+
640 x 480	31.469	59.940	25.175	-/-
640 x 480	37.500	75.000	31.500	-/-
640 x 480	43.269	85.008	36.000	-/-
800 x 600	46.875	75.000	49.500	+/+
800 x 600	53.674	85.061	56.250	+/+
1024 x 768	48.363	60.004	65.000	-/-
1024 x 768	60.023	75.029	78.750	+/+
1024 x 768	68.677	84.997	94.500	+/+
1280 x 1024	79.976	75.025	135.000	+/+

Changing the Stand


Removing the Stand

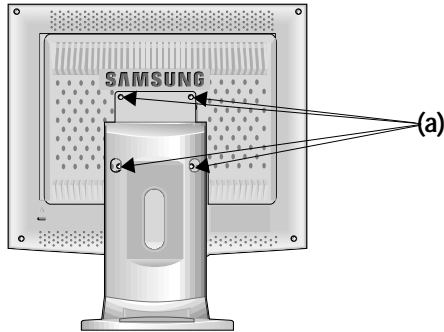

- 1** Turn off your monitor and unplug its power cord.
- 2** Lay the LCD Monitor face-down on a flat surface with a cushion beneath it to protect the screen.
- 3** Remove the 4 screws (a) and then remove the Stand from the LCD Monitor.

Attaching an Arm-Type Stand or Wall Mount Hanger

NOTE: This monitor accepts a 100mm x 100mm VESA-compliant mounting interface pad.

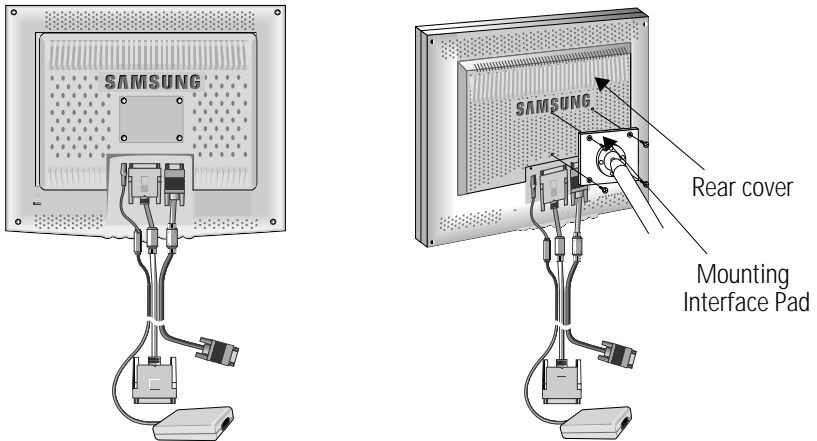

- 1 Align the Mounting Interface Pad with the holes in the Rear Cover and secure it with the four screws that came with the Arm-type Stand or Wall Mount Hanger.

Maintenance of Your LCD Monitor

WARNING: To avoid risk of electric shock, do not disassemble the monitor cabinet (except for gaining access to the cable connectors as described on page 6). Users cannot service the monitor. User maintenance is restricted to cleaning as explained below:

Unplug the monitor from the power outlet before cleaning.

- To clean your LCD Monitor screen, lightly dampen a soft, clean cloth with water or mild detergent. If possible, use a special screen cleaning tissue or solution suitable for the antistatic coating.
- To clean the monitor cabinet, use a cloth lightly dampened with a mild detergent.
- Never use flammable cleaning material to clean your LCD Monitor or any other electrical apparatus.

Numerics

15-pin D-sub connector 21

A

Auto adjustment 7, 12

AUTO 10

Automatic Save 11

B

Blue 14

Brightness 11

Buttons 10

C

Coarse 14

Color 14

Color control 14

D

Deep sleep mode 17

Deutsch 15

Display mode 23

E

English 15

Español 15

EXIT 10

Expanded 16

F

Fine 14

Français 15

G

Geometry 15

Getting help 7

H

Horizontal 14

I

Installing the video driver 7

Image effect 16

Image lock 14

Image size 16

Italiano 15

K

Kensington security slot 4

L

Language 15

M

MENU 10

Menu display time 15

Menu position 15

O

On Screen Display (OSD) 13

OSD Lock/Unlock 12

P

Pin Assignment 21

Plug and play 7

Position 14

Power button 10

Power indicator 10

Preset timing modes 23

R

Red 14

Reset 15

S

Self-Test Feature Check 9

Sleep mode 17

Standby mode 17

Specifications 20

STFC 9

T

Tilt the screen 4

Troubleshooting 18

V

Vertical 14

FCC Information

User Instructions

The Federal Communications Commission Radio Frequency Interference Statement includes the following warning:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television receptions, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

User Information

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

If necessary, consult your dealer or an experienced radio/television technician for additional suggestions. You may find the booklet called How to Identify and Resolve Radio/TV Interference Problems helpful. This booklet was prepared by the Federal Communications Commission. It is available from the U.S. Government Printing Office, Washington, DC 20402, Stock Number 004-000-00345-4.

Warning

User must use shielded signal interface cables to maintain FCC compliance for the product.

Declaration of conformity for products Marked with FCC Logo

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The party responsible for product compliance:
SAMSUNG ELECTRONICS CO., LTD.

America QA Lab of samsung

85 West Tasman Drive

San Jose, CA 95134 USA

Tel.: 408 - 544 - 5124

Fax: 408 - 544 - 5191

Provided with this monitor is a detachable power supply cord with IEC320 style terminations. It may be suitable for connection to any UL Listed personal computer with similar configuration. Before making the connection, make sure the voltage rating of the computer convenience outlet is the same as the monitor and that the ampere rating of the computer convenience outlet is equal to or exceeds the monitor voltage rating.

For 120 Volt applications, use only UL Listed detachable power cord with NEMA configuration 5-15P type (parallel blades) plug cap. For 240 Volt applications use only UL Listed Detachable power supply cord with NEMA configuration 6-15P type (tandem blades) plug cap.

IC Compliance Notice

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations of ICES-003.

Cet appareil Numérique de classe B respecte toutes les exigences du Règlement ICES-003 sur les équipements produisant des interférences au Canada.

MPR II Compliance

This monitor complies with SWEDAC(MPR II) recommendations for reduced electric and magnetic fields.

European Notice

Products with the CE Marking comply with both the EMC Directive (89/336/EEC), (92/31/EEC), (93/68/EEC) and the Low Voltage Directive (73/23/EEC) issued by the Commission of the European Community. Compliance with these directives implies conformity to the following European Norms:

- EN55022:1998 – Radio Frequency Interference
- EN55024:1998 – Electromagnetic Immunity
- EN61000-3-2:1995 + A1 + A2 – Power Line Harmonics
- EN61000-3-3:1995 – Voltage Fluctuations
- EN60950 – Product Safety.

U.S.A. :

Samsung Electronics America (SEA)
One Samsung Place
Ledgewood, NJ 07852
Tel. : 1-800-SAMSUNG (1-800-726-7864)

CANADA :

Samsung Electronics Canada Inc.
7037 Financial Drive
Mississauga, Ontario L5N 6R3
Tel. : 1-800-SAMSUNG (1-800-726-7864)
Fax. : (905) 542-1199

GERMANY:

Samsung Electronics GmbH
Samsung-Haus, Am Kronberger Hang 6
65824 Schwalbach/Ts.
Tel. 49 (0180) 5121213 *
Fax. 49 (0180) 5121214 *
*DM 0,24/Min.

AUSTRALIA :

Samsung Electronics Australia Pty Ltd.
Unit G, 10-16 South Street,
Rydalmere, N.S.W. 2116
P.O. BOX 368
Tel. : (02) 638-5200

ITALIA :

Samsung Electronics Italia SpA
Via C. Donat Cattin,
5-20063 Cernusco sul Naviglio (Mi)
Tel. : 167-010740

PANAMA :

Servicios Samsung (Zona Libre), S.A.
50 and 61 Streets Sta, Cecilia
Bdl. Don Camilo, Panama City
Tel. : (507) 264-0195 or 269-5571
Fax : (507) 269-5568

MEXICO

Samsung Electronics Mexico S.A. de C.V.
Saturno 44 Col. Nva. Industrial Vallejo
Del. Gustavo A. Madero C.P. 07700
Mexico D.F. Tel. 5747-5100
RFC: SEM950215S98

ESPAÑA :

Samsung Electrónica Comercial Ibérica, S.A.
Ciencias, 55-65 (Polígono Pedrosa) 08908
Hospitalet de Llobregat (Barcelona)
Tel. : (93) 261 67 00
Fax. : (93) 261 67 50

UK :

Samsung Electronics (UK) Ltd.
Samsung House, 225 Hook Rise South
Surbiton, Surrey KT6 7LD
Tel. : (0181) 391 0168
Fax. : (0181) 397 9949
<European Service Center & National Service>
Stafford Park 12 Telford, Shropshire, TF3 3BJ
Tel. : (01952) 292 262
Fax. : (01952) 292 033

THAILAND :

Samsung Service Center
729-729/1 JSP Tower Rachadapisek RD.,
Bangpongpan, Yannawa, Bangkok 10120
Tel : (662) 2954508-14
Fax : (662) 2954267

SOUTH AFRICA :

Samsung Electronics South Africa
Somerset Office Park 5 Libertas Road
Bryanston, South Africa
Tel : (27)-11-463-5678
Fax : (27)-11-463-5215

BRASIL :

Samsung Eletrônica da Amazonia Ltda.
R. Prof. Manoelito de Ornellas, 303-2º Andar
Chácara Sto. Antônio • cep : 04719-040
São Paulo • SP
Tel. : (011) 541-8500
Fax : (011) 523-3995, 522-0726

SWEDEN:

Samsung Electronics Svenska, AB
Box 713, S-194 27 Upplands Vasby
Tel.: (468) 590-966-00
Fax : (468) 590-966-50

IMPORTADO POR: SAMSUNG ELECTRONICS MEXICO S.A. DE C.V.
SATURNO 44 COL. NVA. INDUSTRIAL VALLEJO
DEL. GUSTAVO A. MADERO C.P. 07700
MEXICO D.F. TEL. 5747-5100
RFC: SEM950215S98

EXPORTADO POR: SAMSUNG ELECTRONICS CO.,LTD.
JOONG-ANG DAILY NEWS BLDG.
7 SOON-WHA-DONG CHUNG-KU,
C.P.O BOX 2775, 1144 SEOUL, KOREA

**ME06**

"As an ENERGYSTAR® Partner,
SAMSUNG has determined that
this product meets the
ENERGYSTAR® guidelines for
energy efficiency."

P/N: BN68-00183B-00

**Printed on recyclable paper**